

## **Shelving system -Super 1-2-3**

## DESIGN OF THE SHELVES AND TECHNICAL INFORMATION

Shelving frame T-shaped steel profiles B69/T27mm connected with cross and

diagonal struts to form a frame. The vertical profiles are provided with hook-in cut-outs at 33 mm intervals to accommodate the

fixtures.

Sendzimir galvanized surface. upright

heights: 1972, 2236, 2500, 3028mm

Bracing Longitudinal bracing of the shelving is achieved by profiled

T21/H47mm longitudinal beams! Plug-in version.

Sendzimir galvanized surface. Maximum load/ pair of beams:

L900mm/280kg; L1050mm/235kg; L1200mm/205kg; L1350mm

180kg; L1500/145kg

**Shelves** Shelves made of sheet steel, suspended in longitudinal beams

and height-adjustable with these in 33 mm increments. Shelf front height like side rail H47mm! Long sides

folded four times, deep sides folded three times.

Sendzimir galvanized surface.

Shelf depths: 320, 400, 500, 600, 700, 800 mm Shelf lengths: 900, 1050, 1200, 1350, 1500mm Bay lengths: Basic bay=FB length+74mm, add-on bay=

FB length+6mm

Partner of Bundesbeschaffungsgesellschaft mbH (BBG) - www.portal.bbg.gv.at














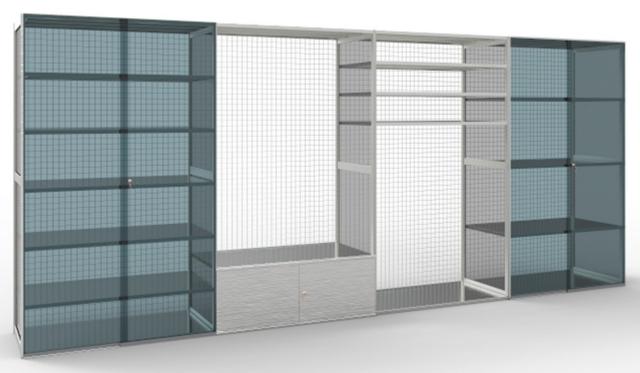

Hinged doors, folded sheet steel, each consisting of 2 leaves and

2 support profiles. The right-hand panel is fitted with a lockable

rotary handle.

Surface powder-coated RAL 7035 light gray.

The hinged doors are fitted with locks with different locking

mechanisms.

Accessories Versatile accessories such as modular storage trays, sliding

metal partitions, add-on storage trays, modular drawers,

sliding ladders, etc.

Areas of application Shelving racks in various lengths, depths, heights and

Shelf combinations with versatile accessories. Floor

systems incl. stairs

Mobile systems

## Partner of Bundesbeschaffungsgesellschaft mbH (BBG) - www.portal.bbg.gv.at









